


# RDS300 Series


## Rubber Seal 3port Pilot type

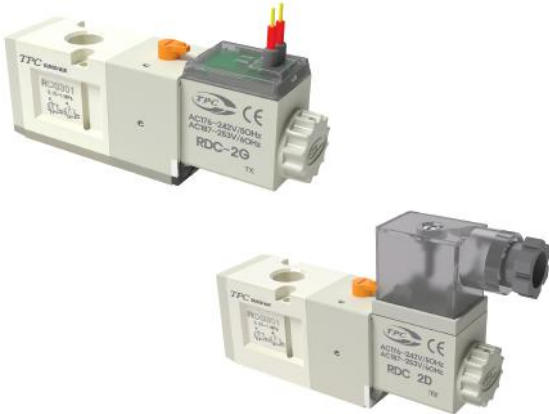

- Compact size and light weight(26.4mm width)
- Large flow capacity
- Easy modification from N.C to N.O
- Made with environment friendly materials
- White color design
- Easy to replace coil


### Symbol

RDS301-○○○-  
○○A(N.C)




### Single

RDS301-○○○-  
○○B(N.O)



## How to order



**1** RDS300 Series  
Blank : Metric Rc(PT)  
U : NPT

**2** Type of actuation  
0 : N.C/N.O

**3** Port type  
1 : Body Ported

**4** Coil Voltage  
1: AC110V, 50/60HZ  
2: AC220V, 50/60HZ  
3: AC120V, 50/60HZ  
4: AC240V, 50/60HZ  
5: DC24V

6: DC12V  
8: AC24V, 50/60HZ  
9: DC100V

**5** Electrical Entry  
G : Grommet(Lead wire 300mm)  
D : DIN Connector  
DZ : DIN Connector(Lamp • Surge voltage protecting circuit attached)  
N : DIN type(connector not included)

**6** Port Size  
01 : Rc(PT)1/8  
02 : Rc(PT)1/4

**7** Action  
A : Normal Close  
B : Normal Open


**8** Length of lead wire  
Blank : 300mm  
XWL01: 100mm  
XWL02: 200mm  
:  
XWL20: 2000mm

\* Integrated push & lock type is standard option for manual operation.

# RDC Series



## How to order



**1** RDC Series

**2** Coil Voltage  
1: AC110V, 50/60HZ  
2: AC220V, 50/60HZ  
3: AC120V, 50/60HZ  
4: AC240V, 50/60HZ  
5: DC24V  
6: DC12V

8: AC24V, 50/60HZ  
9: DC100V

**3** Electrical Entry  
G : Grommet(Lead wire 300mm)  
D : DIN Connector  
DZ : DIN Connector(Lamp • Surge volatage protecting circuit attached)  
N : DIN type(connector not included)

**4** Length of lead wire  
Blank : 300mm  
XWL01: 100mm  
XWL02: 200mm  
:  
XWL20: 2000mm

## DIN TERMINAL BOX Order form



**TVF3130-61-2005**

Additional Symbol

1

### 1 Additional Symbol

Additional Symbol	Rated Voltage
①	AC110V, 50/60Hz
②	AC220V, 50/60Hz
③	AC120V, 50/60Hz
④	AC240V, 50/60Hz
⑤	DC24V
⑥	DC12V
⑧	AC24V, 50/60Hz
⑨	DC100V


### Notice

Please fully understand the safety notice before operating this item.

## Specifications

Fluid	Air	
Action	PILOT Type	
Action	Air + Spring Type	
Position, port	2 positions / 3 ports	
Body Option	Body ported and Base mounted type	
Port Size Rc(PT)	1/8	1/4
Effective Orifice mm <sup>2</sup> (Cv)	19.2 (1.07)	22 (1.2)
Operating Pressure Range	0.15~1.0MPa(1.5~10kgf/cm <sup>2</sup> )	
Ambient and Fluid temperature	5~50°C	
Response time	under 30ms(0.5MPa)	
Max. Operating Frequency	5c/s	
Lamp(LED)	Standard	
Lubrication	Not Required	
Manual operation	PUSH & LOCK	
Mounting Position	Free	
Electrical Entry	Grommet(G)	DIN Connector(DZ)
Lead wire color	AC110V : Blue, AC220V : Red, DC24V : Red • Black	
Enclosure	Dust Proof	
Coil rated Voltage	AC(50/60Hz)	110V, 220V, 120V, 240V, 24V
	DC	24V, 12V, 100V
Allowable voltage fluctuation	-15~+10%	
Coil insulation type	Class H or Equivalent(180°C)	
Allowable temperature	under 40°C	
Apparent power	AC	5.0 VA(50Hz), 4.0VA(60Hz)
Power consumption	DC	3.0W/3.2W(with LED)
Indicator Light & Surge Suppressor Circuit	AC	LED, Varistor
	DC	LED, Varistor


## Construction/Parts List

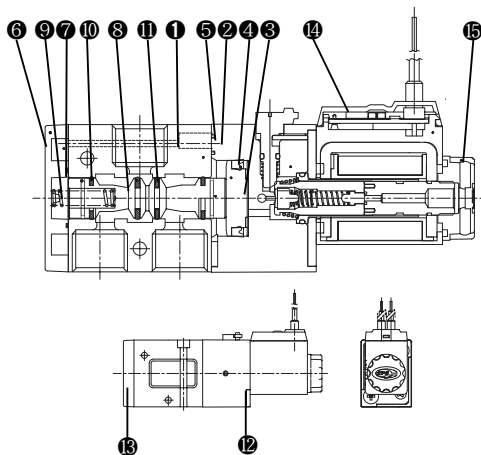


NO.	Description	Material	Remarks
①	Body	Aluminum Die casting	White color
②	Adapter Plate A	Resin	
③	Piston	Resin	
④	Piston Packing	NBR	
⑤	Adapter Plate gasket	NBR	
⑥	End Cover	Resin	
⑦	End Cover gasket	NBR	
⑧	Spool	Alumium	
⑨	Spool Spring	Spring Steel	
⑩	Spool Packing	NBR	
⑪	Quad Ring	NBR	
⑫	+Pan Headed Screw	Carbon steel	M4×0.7×30 l
⑬	+Flush Headed Screw	Carbon steel	M3×0.5×8 l
⑭	Coil Ass'y	-	
⑮	Core Fixed Nut	Resin	

## Body Ported/2 Position

### Grommet RDS301-OG

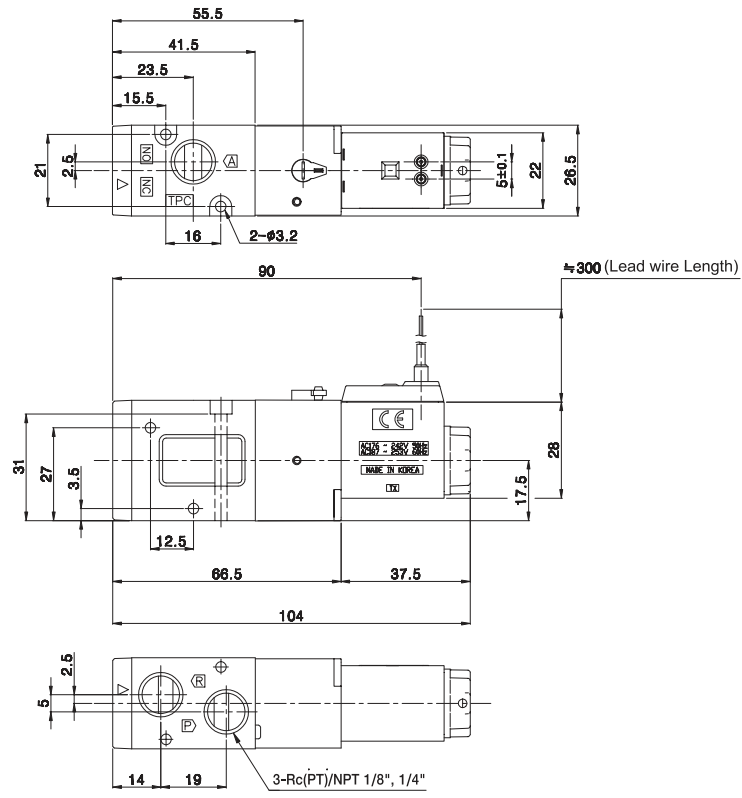


### DIN Connector RDS301-ODZ

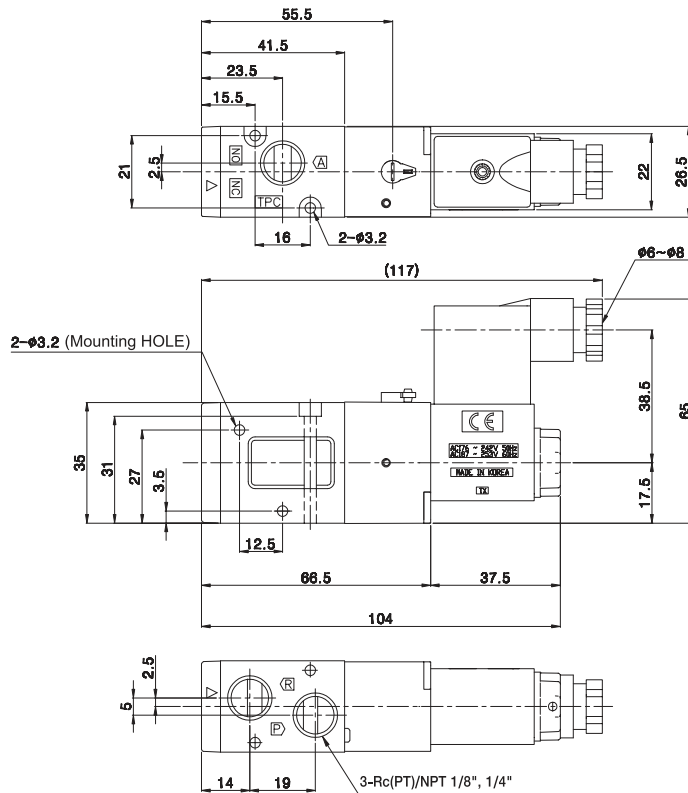

# RDS301 Series

## Change of Actuation(RDS 300)

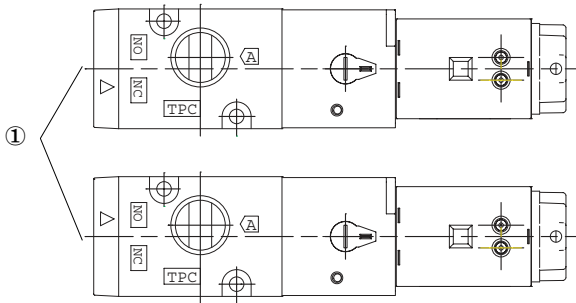

As shown in the figure above, in event that it is needed to change the actuation from normally closed style to normally open style, it is preferred to remove the body from the sub plate and reset the “▲” mark on the body corresponding to the “NO” mark on the sub plate.


For piping, it is preferred to check the following table.

Flow Path Post	P	A	R
N · C	Upstream	Downstream	Exhaust side
N · O	Exhaust side	Downstream	upstream

## Electronical Connection

Be sure to check the inner connections are as follows for the DIN connection and Terminal connection. (with surgeprotection circuit)


### Din Connection



Terminal NO.	1	2
DIN Connection	+	-

## Change of Electrical Entry

Be sure to push out the body of DIN terminal from the cover, and turn it at 180° and then insert it.


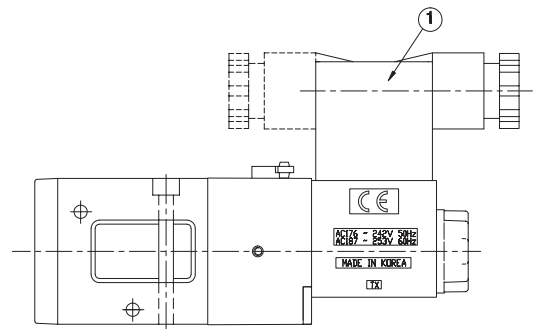


## Notices for Handling

### ■ Notice

Please fully understand the safety notice before operating this item.

### Indicator Light / Surge Voltage Suppressor









Rated Voltage	AC, DC
Less than 24V	 <p>DZ</p>
Less than 200V	 <p>Neon lamp EZ, TZ, DZ</p>

(Note1) No lamp attaching type for Grommet (G) type

(Note2) ZNR is called as Varistor, which is surge voltage protection circuit.

### In Case of Using 3-Port Valve (in case of 5-port)

With closing one direction of cylinder port (A and B), it is applied as 3-port valve of normal closed (N.C) or Normal Open (N.O). It is convenient if 3-port valve is necessary. But, do not apply for special purposes such as Non Leak Valve. Moreover, please use with opened condition for exhaust port.

Plug Location		BPort (CYL.1Port)	APort (CYL.2Port)
Solenoid Number	Single	(X)Plug 	(X)Plug 
		(X)Plug 	(X)Plug 
	Double	(X)Plug 	(X)Plug 
		(X)Plug 	(X)Plug 

### For the Quality of Fluid Applied

- ① 5 $\mu$ m filter resolution is sufficient.
- ② Large amount of drain may cause operation failure of pneumatic equipment which firstly uses valve and environmental contamination, so that special management is required. Moreover, if management of drain exhaust is difficult, it is recommended to use automatic exhaust attaching filter.
- ③ If large quantity of carbon powder is generated from compressor, it may cause operation failure owing to attaching on valve inside. It is recommended to use less carbon powder generating compressor or install coalescing filter.


### For Piping

- ① Fully remove chip, cutting oil or dust in a pipe with air blow (flushing) or washing prior to piping.
- ② When connecting fittings or piping, be careful to prevent chips or particles from getting inside. Do not wind seal tape on whole threads. Leave 1.5~2 threads unwound.
- ③ Check if silencer is attached to PE port of Manifold valve.
- ④ Connecting torque for piping.

Contact screw	Proper Tightening Torque kgf · cm(N · m)	Material of Tightening Part
M3	3.1~3.9(0.31~0.39)	Resin
	4.7~5.9(0.47~0.59)	Aluminum
M4	7.5~9.5(0.75~0.95)	Resin
	11.5~14.5(1.15~1.45)	Aluminum
M5	15~20(1.5~2)	Resin
PT 1/8	70~90(7~9)	Aluminum
PT 1/4	120~140(12~14)	

## For Leakage Voltage

- ① In case of power OFF, restrain residual leakage voltage in both ends of AC coil under 20% of rated voltage, and under 3% for DC coil. (Please measure AC coil with manually pressing metal pin.)
- ② In case of using C-R circuit for contact point protection, be cautious that leakage voltage possibly increases owing to leakage current through C-R circuit.

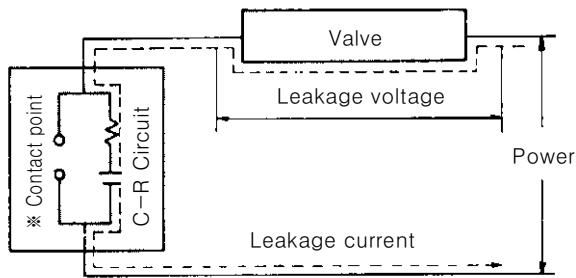

\* Be cautious that some of non-contact point relays have protection circuit built-in

## Operating Environment

- ① Do not attach around the place affected by corrosive gas, chemical liquid, sea water splash, rainwater and steam.
- ② Make a measure such as protection cover, etc, for attaching in the place affected by water drops, oil and splatter during welding process.
- ③ Prevent inflow of dust into valve with attaching silencer at exhaust port of valve.

## For Using in Low Temperature

It is available to use by  $-10^{\circ}\text{C}$ , however, full caution is needed for condensation of drain and moist. It is recommended to install drier for the case above.

## For Sequential Power Supply

In case of sequential power supply, apply more than 0.1 second for power supply and 0.05 second for power OFF.

## In Case of Long Term Power Supply

In case of using for a long period with power supply, please ask for consultation to manufacturer.

## How to Find the Flow Rate

- ① In case of  $P_2+1.033 \leq P_1+1.033 \leq 1.89(P_2+1.033)$

$$Q = 22.2S \sqrt{\frac{\Delta P(P_2+1.033)}{G}} \cdot \sqrt{\frac{273}{273+\theta}}$$

- ① In case of  $1.89(P_2+1.033) < P_1+1.033$

$$Q = 11.1S(P_1+1.033) \frac{1}{\sqrt{G}} \cdot \sqrt{\frac{273}{273+\theta}}$$

Q : Flux in Conventional Condition (N l /min)

$P_1$  : 1st Side Pressure (Gauge Pressure) (kgf/cm<sup>2</sup>)

$P_2$  : 2st Side Pressure (Gauge Pressure) (kgf/cm<sup>2</sup>)

$\Delta P$  : Pressure Differential ( $P_1 - P_2$ ) (kgf/cm<sup>2</sup>)

S : Effective Orifice (mm<sup>2</sup>)

G : Specific Gravity (Air=1)

$\theta$  : Temperature of Air Applied ( $^{\circ}\text{C}$ )

## Lubrication

- ① Initially lubricated, possible to use with non-Lube.
- ② Please use turbine oil class 1 (ISO VG32)  
Moreover, if refueling is stopped, it may cause operation failure owing to loss of initial lubricant, so that refueling should be continued.  
Please contact for turbine oil class 1 (ISO VG32)

## Port Indicating Symbol Sheet

Index	RDS300	RDS3000, RDS5000
Inlet	P(SUP)	
Outlet	A(CYL)	A(CYL.2) and B(CYL.1)
Exhaust hole	R(EXH)	R1(EXH2) and R2(EXH1)
KS symbol (Single Solenoid)		
	S:P(SUP)	

# RDS300 Series

## MANIFOLD



### TYPE · SPECIFICATIONS

MANIFOLD TYPE	B MOUNT (Single base type)
<sup>(1)</sup> Max. num of stations	12 Stations

(1) For B mount type with more than 6 stations, put pressure in through both sides of P(SUP) port and exhaust through both sides of R(EXH) port.

### TYPE · SPECIFICATIONS

TYPE	MANIFOLD BASE TYPE	<sup>(1)</sup> R(EXH) TYPE	PIPING DIRECTION / JUNCTION POINT			PORT SIZE Rc(PT)			VALVE APPLIED
			P(SUP)	R(EXH)	A(CYL)	P(SUP)	R(EXH)	A(CYL)	
B MOUNT	RDS3M-30	COMMON	SIDE	SIDE	TOP	1/4	1/4	1/8, 1/4	RDS300
			BASE	BASE	VALVE				

(1) P port types are all common type.

### HOW TO ORDER BLANK PLATE

**RDS3B - 30**

Note1) Including gasket and attachable bolt.

### HOW TO ORDER MANIFOLD GASKET

**RDS3G - 30**

### HOW TO ORDER

**RDS3 M - 30 - 02**

1   
 2   
 3   
 4

**1** RDS300 series

**2** Manifold

**3** Manifold type


30	Body ported
----	-------------

**4** Num of stations



02	2 stations
03	3 stations
...	...
12	12 stations

### B MOUNT TYPE / RDS3M - 30

COMMON EXH / RDS3M - 30 - 00



※ BE AWARE OF PORT DIRECTION WHEN PUT TOGETHER.

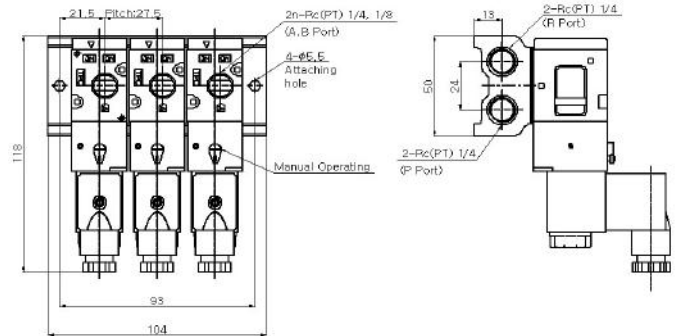

### L : DIMENSION

(n: num of stations)

	1 STN	2 STN	3 STN	4 STN	5 STN	6 STN	7 STN	8 STN	9 STN	10 STN	11 STN	12 STN
L1	46	65.5	93	120.5	148	175.5	203	230.5	258	285.5	313	340.5
L2	37	76.5	104	131.5	159	186.5	214	241.5	269	296.5	324	351.5