



# Miniature Pneumatic Valves

## Kuhnke 74 Series Valve - Plunger & Push Button




### Technical information

<b>Actuation force @ 6 bar:</b>	Approx. 25N
<b>Pressure range:</b>	0-12 bar
<b>Temperature range:</b>	-10°C...+60°C
<b>Housing:</b>	Zinc alloy
<b>Seals:</b>	Perbunan
<b>Lubricant:</b>	Not required
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air



Symbol	Description	Type	Orifice	Ports	Order code
	3/2 way plunger spring return normally closed sintered exhaust	Poppet	2mm	M5	<b>74.000</b>
	3/2 way push button spring return normally closed sintered exhaust	Poppet	2mm	M5	<b>74.002</b>

### Dimensional drawings

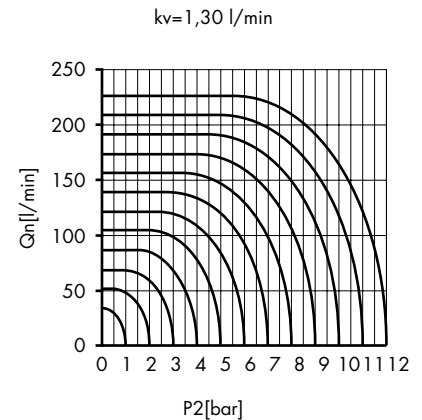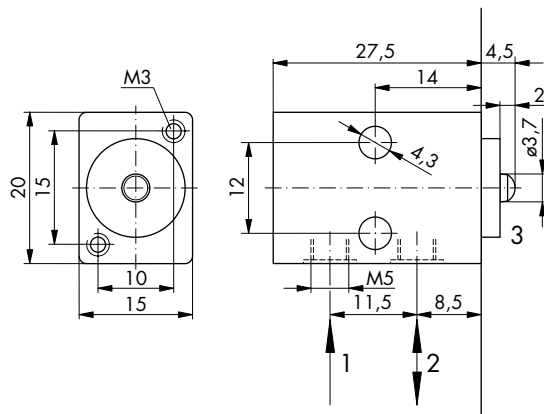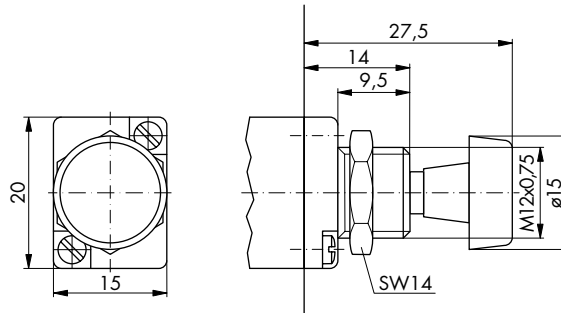





# Miniature Pneumatic Valves

## Kuhnke 74 Series Valve - Toggle Lever & Joystick

### Technical information

<b>Actuation force @ 6 bar:</b>	Approx. 4.5N (74.001) 3N (74.009)
<b>Pressure range:</b>	0-12 bar
<b>Temperature range:</b>	-10°C...+60°C
<b>Housing:</b>	Zinc alloy
<b>Seals:</b>	Perbunan
<b>Lubricant:</b>	Not required
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air



Symbol	Description	Type	Orifice	Ports	Order code
	3/2 way toggle lever detented normally closed sintered exhaust	Poppet	2mm	M5	74.001
	3/2 way joystick spring return normally closed sintered exhaust	Poppet	2mm	M5	74.009

### Dimensional drawings

