

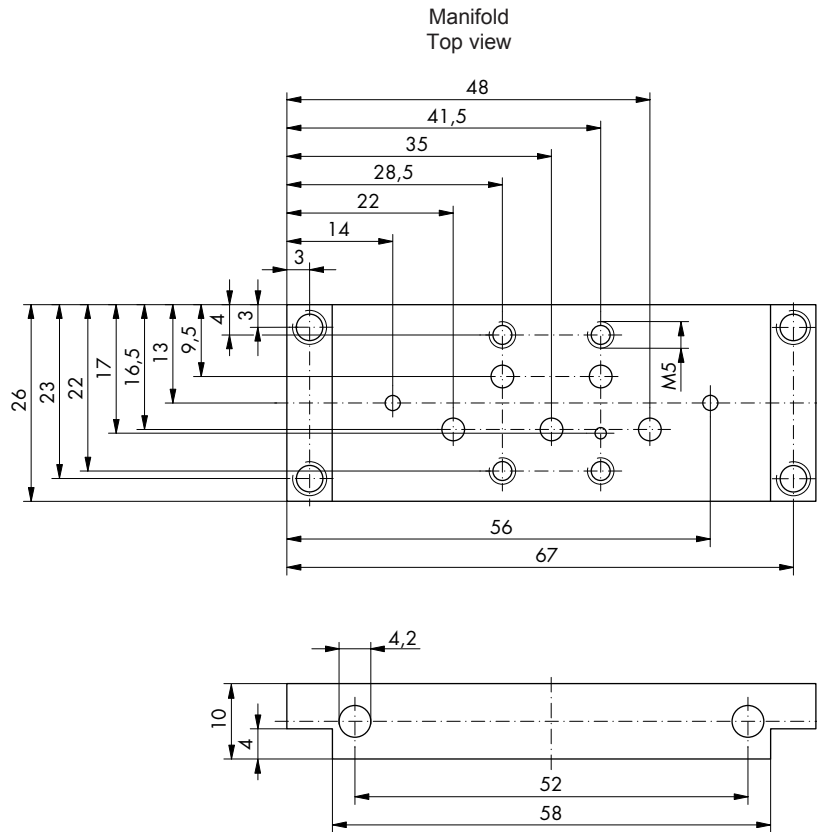
# Manifolds & Subplates

## 84 Series Subplate Single Valve Subplate

Minimum order quantities may apply.

Description	Order code
Single manifold M5 bottom ported	84.402.01

### Dimensional drawings



All accessories are included to complete your manifold including banjo screws and washers.

For use with the following valve types:

84.212/84.214

# Miniature Pneumatic Valves

## Kuhnke 84 Series Valve - 5/2 Way Manifold Mounting



### Technical information

<b>Pressure range:</b>	0-10 bar
<b>Temperature range:</b>	-10°C...+70°C
<b>Housing:</b>	Aluminium alloy/Zinc alloy/Makrolon
<b>Spool &amp; liner:</b>	Steel, corrosion resistant
<b>Lubricant:</b>	Not required
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air.

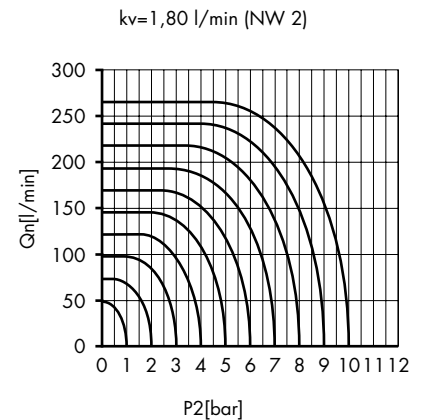
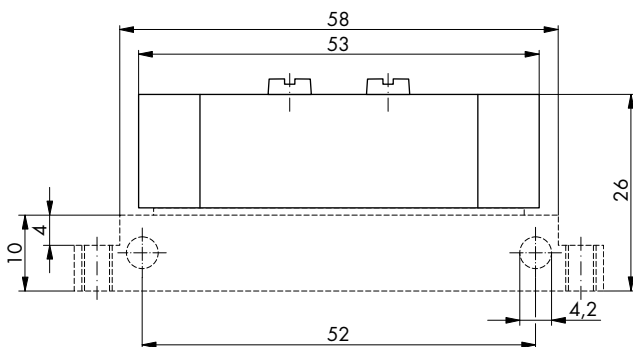


### Other information

Subplates are available for this product, please see data sheet M1011.

Symbol	Description	Type	Orifice	Order code
	5/2 way pilot spring return	Spool	2mm	<b>84.212</b>
	5/2 way double pilot	Spool	2mm	<b>84.214</b>

### Dimensional drawings



# Miniature Solenoid Valves



## Kuhnke 84 Series Valve - 5/2 Way Manifold Mounting

### Technical information

<b>Pressure range:</b>	2-8 bar
<b>Temperature range:</b>	-10°C...+50°C
<b>Duty cycle:</b>	Continuous 100%
<b>Housing:</b>	Aluminium alloy/Zinc alloy/Makrolon
<b>Spool &amp; liner:</b>	Steel, corrosion resistant
<b>Lubricant:</b>	Not required.
<b>Earthing contact:</b>	Part of the standard device.
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air.

### Other information

Insert coil voltage required to complete the order code, example 84.240.01 24VDC.  
Standard voltages are 12 and 24 VDC: 24, 110 and 230 VAC.  
Order connecting plugs separately, part number 64.230.01.  
Subplates are available for this product, see data sheet M1011.

Symbol	Description	Coil Power	Type	Orifice	Order code
	5/2 way single solenoid spring return DC coil	1.8 W	Spool	2mm	<b>84.240.01</b>
	5/2 way single solenoid spring return AC coil	5.5 VA	Spool	2mm	<b>84.240.02</b>
	5/2 way double solenoid DC coil	1.8 W	Spool	2mm	<b>84.244.01</b>
	5/2 way double solenoid AC coil	5.5 VA	Spool	2mm	<b>84.244.02</b>

### Dimensional drawings

