

Manually Operated Pneumatic Valves

Pneumatic Selector Valve - Long Rotary Selector

Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air



Other information

For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX




Symbol	Description	Type	Orifice	Ports	Switch	Order code
	3/2 way maintained position	Spool	6mm	G1/8	Black	76.022.47.21
	5/2 way maintained position	Spool	6mm	G1/8	Black	76.023.47.41


Dimensional drawings

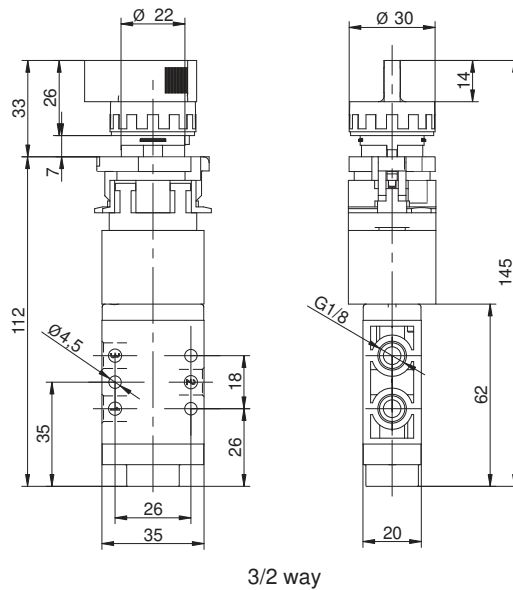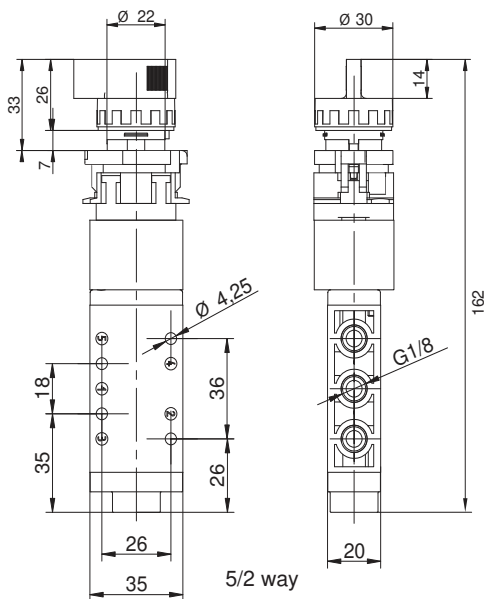

Flow rate orifice 6mm
kv=9,7 l/min



Panel Drilling Plan



Manually Operated Pneumatic Valves

Pneumatic Selector Valve - Long Rotary Selector

Technical information

Air Pilot Assited



Actuation Force @ 6 bar:	8N
Pressure range:	2.5-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information






For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Switch	Order code
	3/2 way maintained position	Spool	6mm	G1/8	Black	76.022.57.21
	5/2 way maintained position	Spool	6mm	G1/8	Black	76.023.57.41

Dimensional drawings

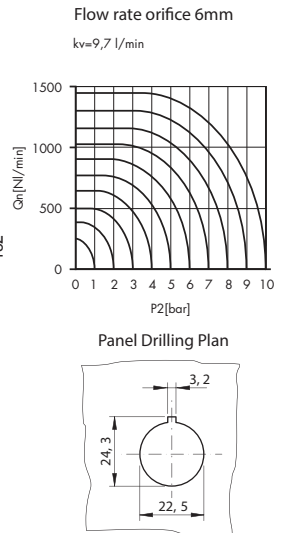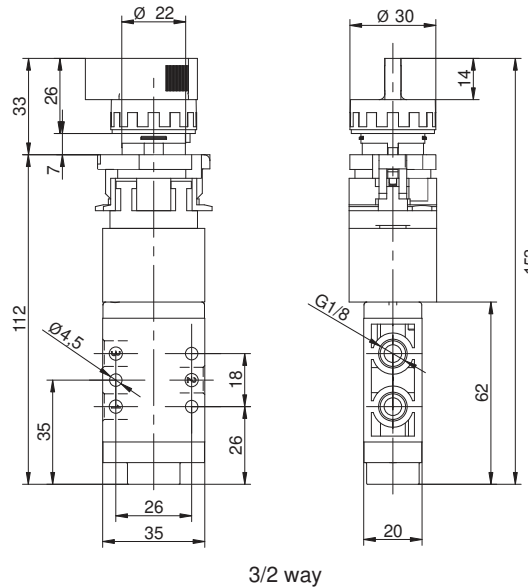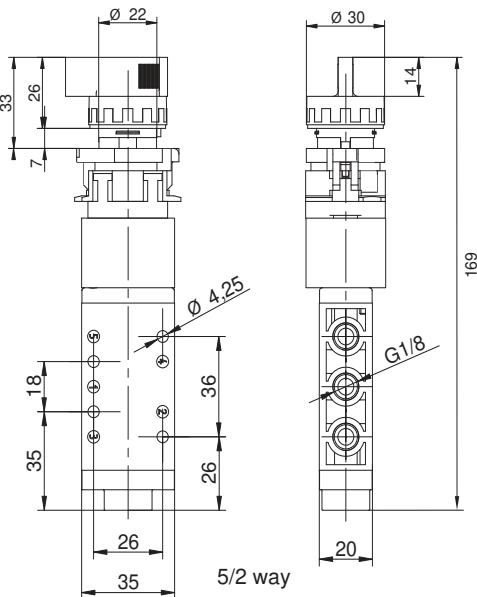

Manually Operated Pneumatic Valves

Pneumatic Selector Valve - Short Rotary Selector

Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information




For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Switch	Order code
	3/2 way maintained position	Spool	6mm	G1/8	Black	76.022.46.21
	5/2 way maintained position	Spool	6mm	G1/8	Black	76.023.46.41

Dimensional drawings

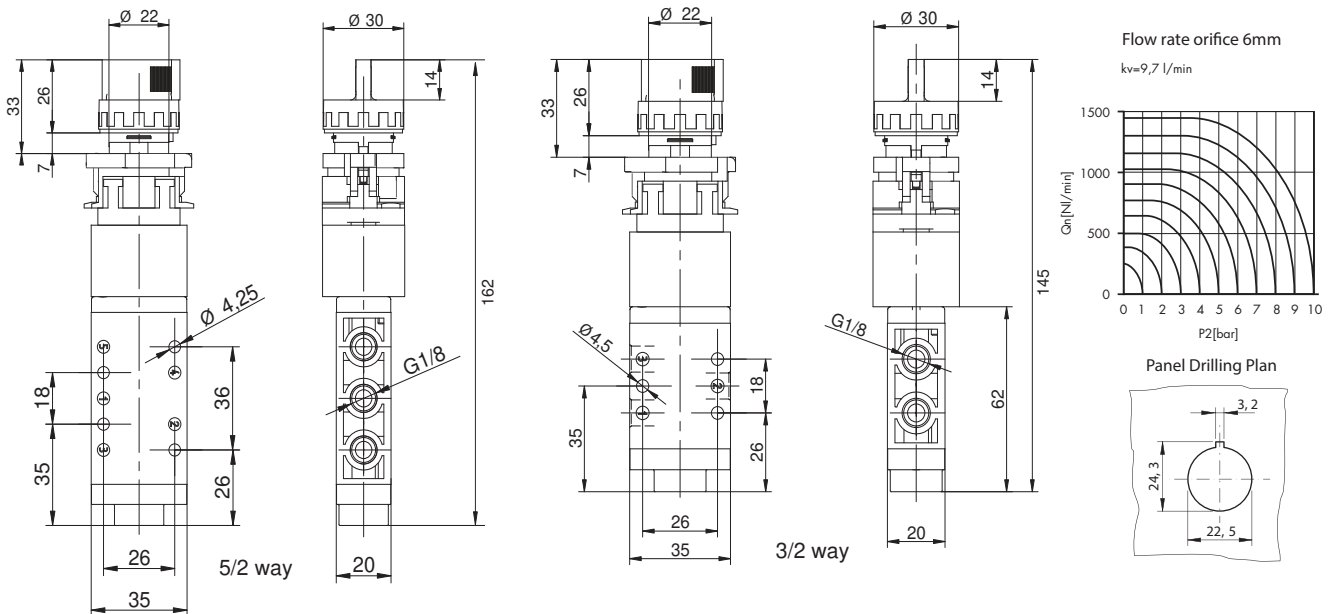

Manually Operated Pneumatic Valves

Pneumatic Selector Valve - Short Rotary Selector

Technical information

Pressure range:	2.5-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air



Air Pilot Assisted



Other information



For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX

Symbol	Description	Type	Orifice	Ports	Switch	Order code
	3/2 way maintained position	Spool	6mm	G1/8	Black	76.022.56.21
	5/2 way maintained position	Spool	6mm	G1/8	Black	76.023.56.41

Dimensional drawings

