


# DVC1000 Series

5 Port Pilot Solenoid Valve

Directional Control Valve

DVC1000 Series

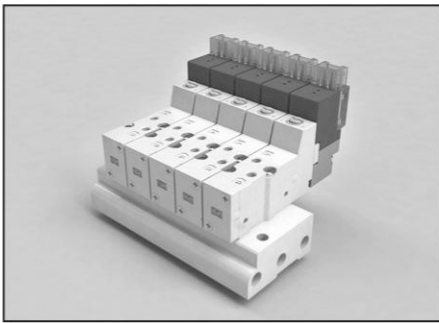

- Obtains the performance equivalent to the individual/collective exhaust specifications
- Obtains large oil capacity compared to other companies' model of its kind
- Adopts the shape to prevent nudging when operating direct-piping gasket at high pressure for a long time
- Enhances user convenience with the base-piping gasket built in the valve body

## How to Order

**DVC1** **1** **2** **0** — **5** **H** **S** — **M5** — **WXL\*\***

1
2
3
4
5
6
7
8
9

**1** DVC1000 COMPACT TYPE VALVE

**2** Configuration

- 1 : Single
- 2 : Double
- 3 : Closed center
- 4 : Exhaust center
- 5 : Pressuer center

**3** Manifold Specifications

- 2 : Body ported type
- 4 : Base mounted type

**4** Exhaust type

- 0 : Individual exhaust
- 3 : Collective exhaust

**5** Voltage

- 1 : AC 110V
- 2 : AC 220V
- 5 : DC 24V
- 6 : DC 12V

**6** Electrical Entry

- H : Horizontal connector
- V : Vertical connector
- Note) AC voltage only available for horizontal connectors

**7** PCB type

- No symbol : Basic type (lamp type)
- D : Non-polar LAMP TYPE
- S : Power-saving PCB TYPE
- Note) D/S specifications only applicable for DC voltage

**8** Option

- \* Sub plate & bracket attached
- No symbol : No attachment specification
- M5 : M5 x 0.8 (sub plate attached) base piping
- B : BRACKET
- Direct piping
- Note) Bracket is released in a state of non-assembly.

**9** Length of lead wire

- No symbol : 300 mm
- XWL 01 : 100 mm
- 02 : 200 mm
- :
- 20 : 2,000 mm

## How to Order

### MANIFOLD

**DVCM1** — **20** — **02**

1
2
3

**1** MANIFOLD for DVC1000 valve

**2** Manifold Specifications


- 20 : Body ported type
- 40 : Base mounted type

**3** Stations (01~20)

- Note 1) Body ported type : the minimum station is 2station.
- Note 2) Base mounted type : 1station is sub plate.




Body Ported type



Base mounted type

BRACKET ASS'Y(Direct piping) : DVC1000-B2

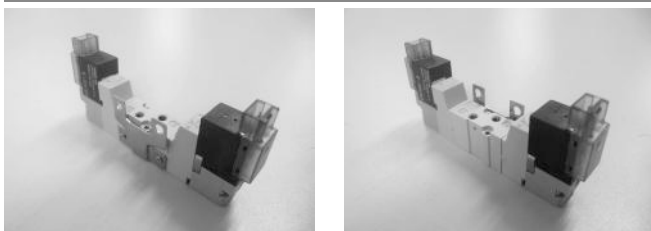

Bracket attached

BLANK PLATE ASS'Y(For both direct/base piping) : DVCM1-B



BRACKET  
(2 attached bolts included)



BLANK PLATE  
(Note: one built-in type gasket attached; two bolts included)