

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 3/2 Way Angled Lever G1/8 ports




Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information






Ex For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.54 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	3/2 way maintained position	Spool	6mm	G1/8	Black	76.022.25.00
	3/2 way spring return normally closed	Spool	6mm	G1/8	Black	76.022.25.21
	3/2 way maintained position with pilot return **	Spool	6mm	G1/8	Black	76.022.25.22

Dimensional drawings

**Dimensional drawing upon request

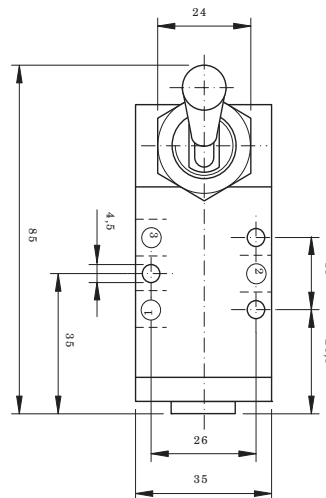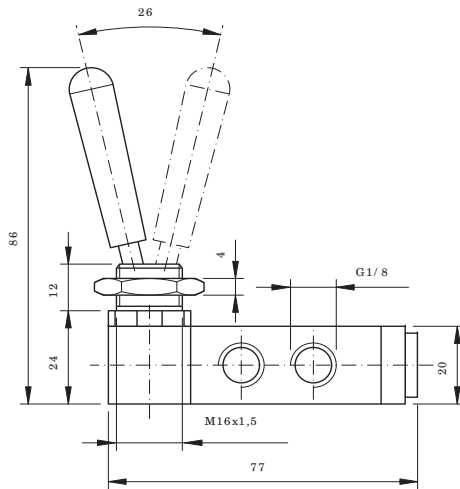

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 3/2 Way Angled Lever G1/4 ports




Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast aluminium alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information






For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.55 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	3/2 way maintained position	Spool	8mm	G1/4	Black	76.042.25.00
	3/2 way spring return normally closed	Spool	8mm	G1/4	Black	76.042.25.21
	3/2 way maintained position with pilot return **	Spool	8mm	G1/4	Black	76.042.25.22

Dimensional drawings

**Dimensional drawing upon request

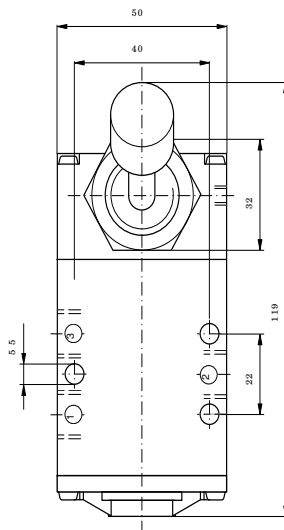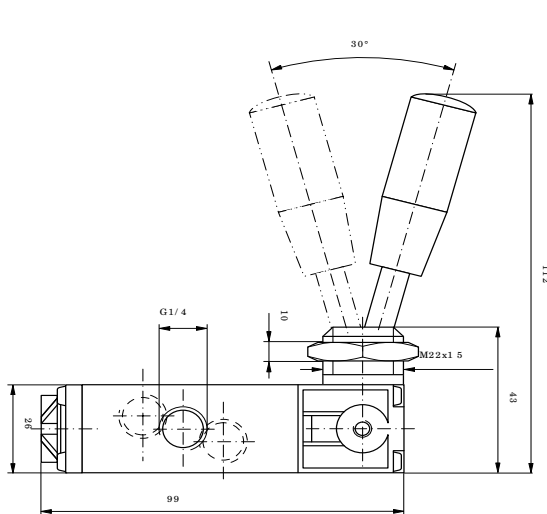

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 5/2 Way Angled Lever G1/8 Ports

Technical information




Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.



Other information






For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.54 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	5/2 way maintained position	Spool	6mm	G1/8	Black	76.023.25.40
	5/2 way spring return	Spool	6mm	G1/8	Black	76.023.25.41
	5/2 way maintained position with pilot return **	Spool	6mm	G1/8	Black	76.023.25.42

Dimensional drawings

**Dimensional drawing upon request

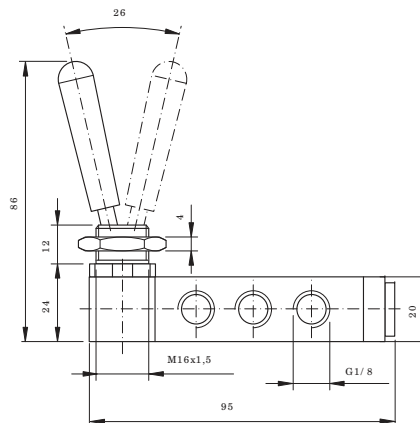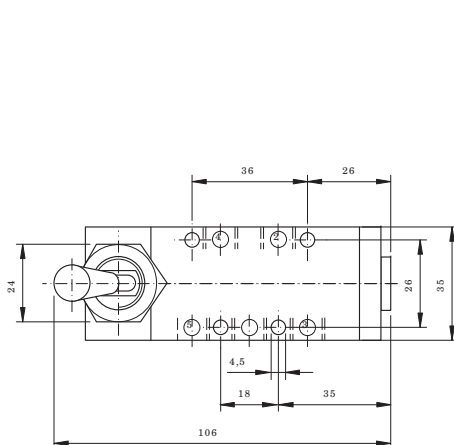

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 5/2 Way Angled Lever G1/4 Ports




Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Glass fibre reinforced PPA
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.






Other information

For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.55 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	5/2 way maintained position	Spool	8mm	G1/4	Black	76.143.25.40
	5/2 way spring return	Spool	8mm	G1/4	Black	76.143.25.41
	5/2 way maintained position with pilot return **	Spool	8mm	G1/4	Black	76.143.25.42

Dimensional drawings

**Dimensional drawing upon request

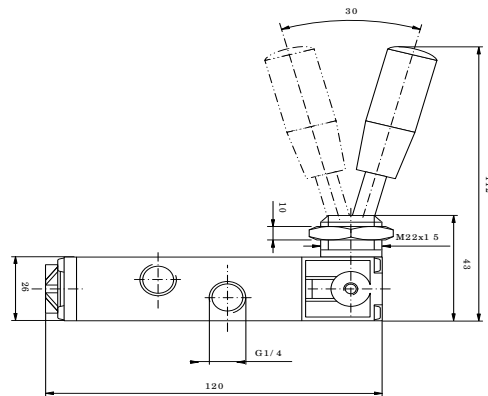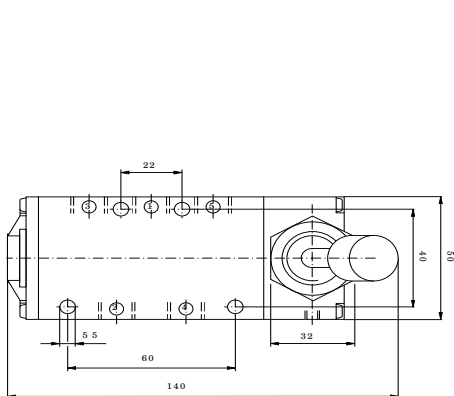

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 5/3 Way Angled Lever G1/8 Ports

Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air



Centre Ports Closed






Other information



For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.54 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	5/3 way spring return to centre	Spool	6mm	G1/8	Black	76.024.25.38
	5/3 way maintained position	Spool	6mm	G1/8	Black	76.024.25.39

Dimensional drawings

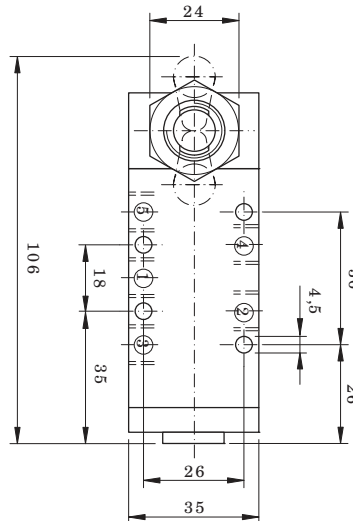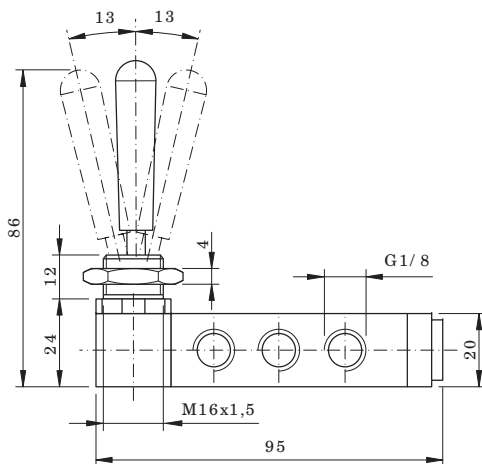

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 5/3 Way Angled Lever G1/4 Ports

Technical information



Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Glass fibre reinforced PPA
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.

Centre Ports Closed






Other information

For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.55 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	5/3 way spring return to centre	Spool	8mm	G1/4	Black	76.144.25.38
	5/3 way maintained position	Spool	8mm	G1/4	Black	76.144.25.39

Dimensional drawings

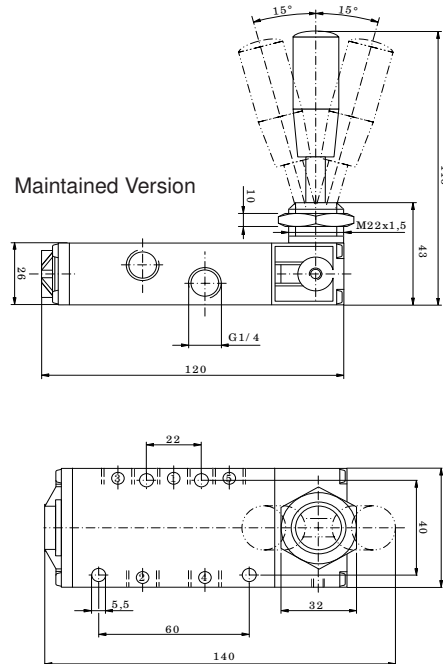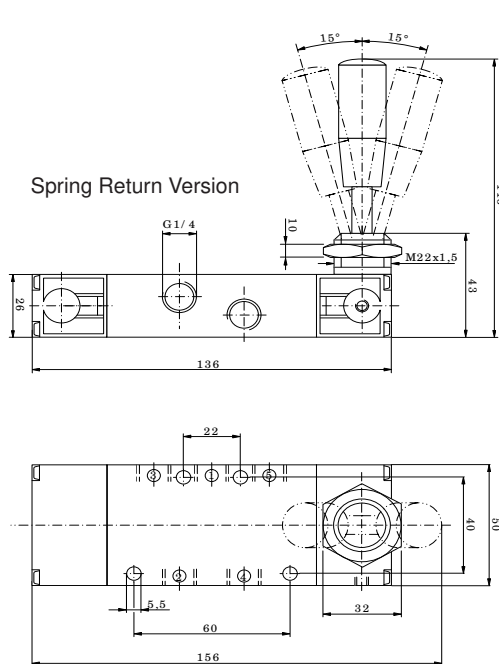

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 5/3 Way Angled Lever G1/8 Ports

Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air



Centre Ports Exhaust






Other information



For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.54 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	5/3 way spring return to centre	Spool	6mm	G1/8	Black	76.024.25.28
	5/3 way maintained position	Spool	6mm	G1/8	Black	76.024.25.29

Dimensional drawings

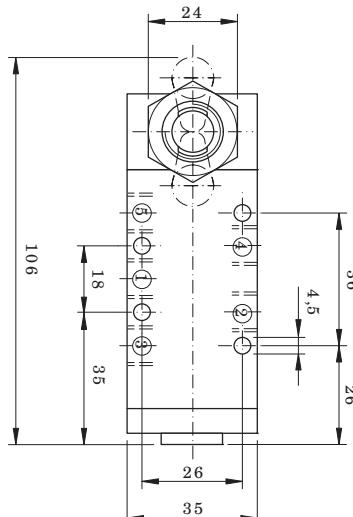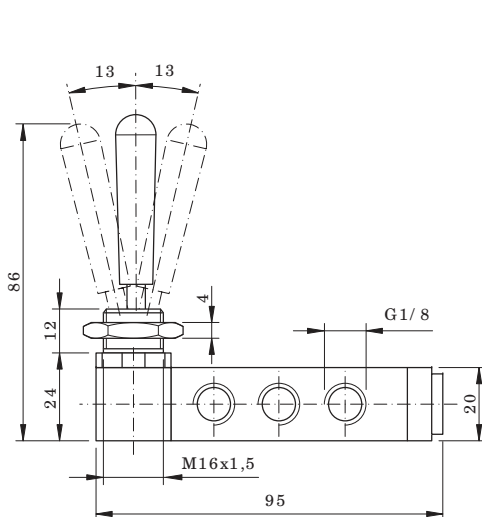

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 5/3 Way Angled Lever G1/4 Ports

Technical information



Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Glass fibre reinforced PPA
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.

Centre Ports Exhaust






Other information

For NPT ports use prefix code "75" for example 75.XXX.XX.XX
Bellows available 76.420.00.55 (5 pcs)

Symbol	Description	Type	Orifice	Ports	Lever	Order code
	5/3 way spring return to centre	Spool	8mm	G1/4	Black	76.144.25.28
	5/3 way maintained position	Spool	8mm	G1/4	Black	76.144.25.29

Dimensional drawings

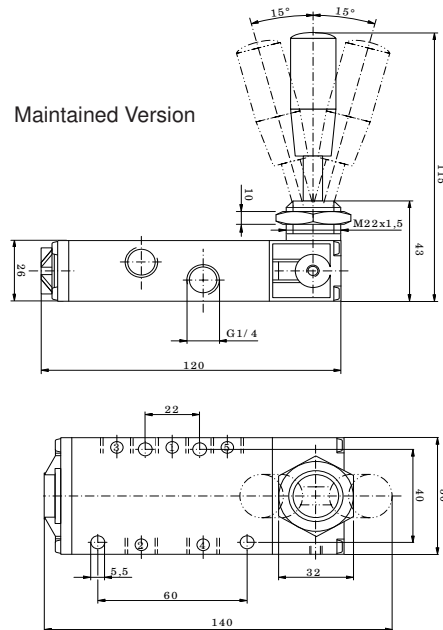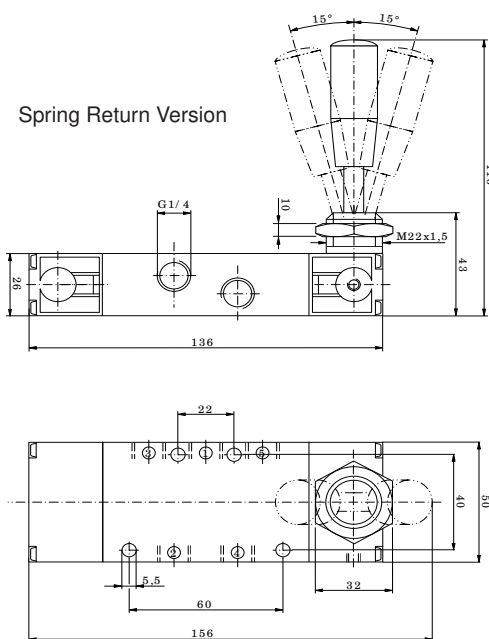

Manually Operated Pneumatic Valves

Pneumatic Lever Valve G1/8 Ports Inline Lever

Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information



For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Lever	Order code
	3/2 way maintained position	Spool	6mm	G1/8	Black	76.022.26.21
	5/2 way maintained position	Spool	6mm	G1/8	Black	76.023.26.41

Dimensional drawings

